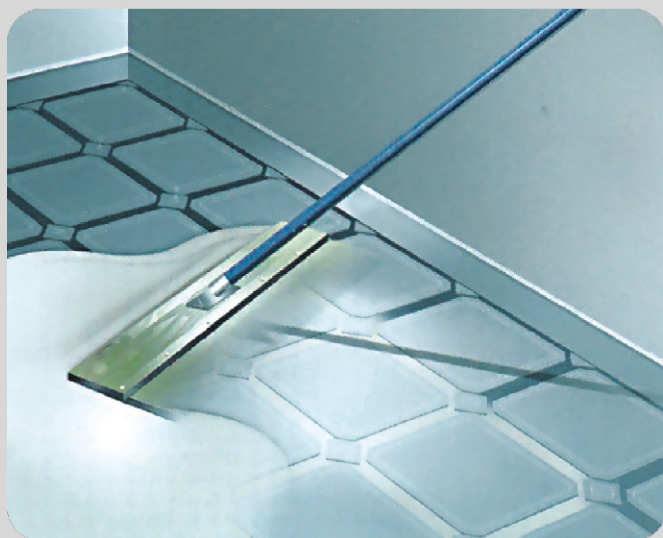


## Specifications

In accordance with the International Standard ISO13007-3:2004 or TCVN 7899-3: 2008 of CG2 WA type.

Bending strength under standard conditions (ISO 13007-4:2005):	$\geq 2,5 \text{ N/mm}^2$
Compressive strength under standard conditions (ISO 13007- 4: 2005):	$\geq 15 \text{ N/mm}^2$
Damp - proof	Very good
Anti-aging	Very good
Ability to resist solvent, oil and zinc	Very good
Ability to resist acid	Good if $\text{pH} > 3$



**CÔNG TY CP BÊ TÔNG, XÂY DỰNG A&P**  
A&P CONSTRUCTION, CONCRETE., JSC

No. 26/389, Hoang Quoc Viet Street, Cau Giay District, Hanoi  
Tel: (84.43) 8 362 703 - Fax: (84.43) 7 568 820  
Email: ap@apcorp.com.vn - Web: www.apcorp.com.vn

### MOVA READY MIXED MORTAR FACTORY

No. 59, Thien Duc Street – Yen Vien – Gia Lam - Hanoi  
Tel: (+84-4)3698 3029 - Fax:(+84-4)3698 3028  
Email: mova@mova.com.vn - Web: www.mova.com.vn  
www.remitar.com.vn - www.remitar.vn

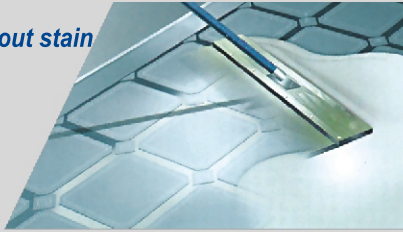
**MOVA TILE JOINT GROUT**  
*Colorful, long-term use without stain*



**MOVA**

*Công nghệ HLB Đức*

[www.mova.com.vn](http://www.mova.com.vn)

**Standard joint grout***Colorful, long-term use without stain***2. Usage norm**

Actual usage norm of JGB for 1m<sup>2</sup> tile is based on the width of joint, dimensions and thickness of tile which is determined by the formula:

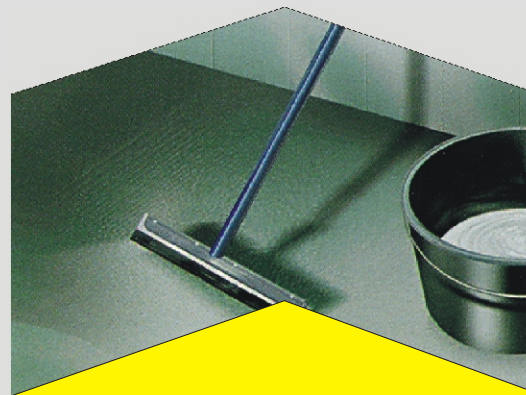
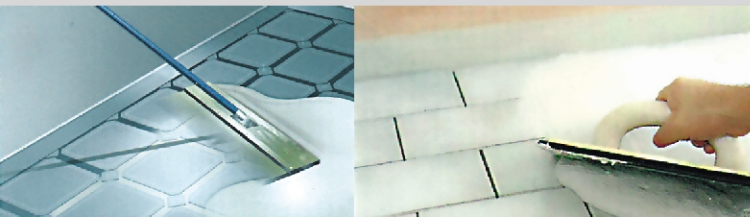
$$\text{MOVA JGB} = (A+B)/(A \times B) \times C \times D \times 1,6 \text{ Kg/m}^2$$

Notes: *A = Length of tile (mm)*  
*B = Width of tile (mm)*  
*C = Thickness of tile (mm)*  
*D = Width of inserted joint (mm)*

**3. Package:** In damp - proof paper bags typed 5 and 25 kgs

**4. Storage:** At least 6 months, in unopened conditions in dry place

**5. Certificate:** In accordance with the International Standard 13007-3: 2004 and Vietnam standard TCVN 7899-3: 2008 of CG2 WA type

**1. Outstanding features:**

- Multi-color – colorproof under the sunshine – not subjected to black joint for the long-term use (See color chart of Mova jointing grout available at Mova showroom and at [www.mova.com.vn](http://www.mova.com.vn))
- High compressive and bending strength.
- Easy to use and fast application.
- Good water-proof, especially when mixed with MovaLastic which is suitable to swimming pool and wet areas and heavy loading floor ect.
- Create polish and fine surface of joint in order to easily clean.
- No destruction to the surface of tile and marble stone during the application.
- Hardening without any shrinkage and good ability to bear mechanical effects.

**Fine joint grout***Colorful, long-term use without stain***2. Usage norm**

Actual usage norm of JGF for 1m<sup>2</sup> tile is based on the wide of slot, dimensions and thickness of tile which is determined by the formula:

$$\text{Mova JGF} = (A+B)/(A \times B) \times C \times D \times 1,4 \text{ Kg/m}^2$$

Notes: *A = Length of tile (mm)*  
*B = Width of tile (mm)*  
*C = Thickness of tile (mm)*  
*D = Width of inserted joint (mm)*

**3. Package:** In damp - proof paper bags typed 3 and 20 kgs

**4. Storage:** At least 6 months, in unopened conditions in dry place

**5. Certificate:** In accordance with the International Standard 13007-3: 2004 and Vietnam standard TCVN

